
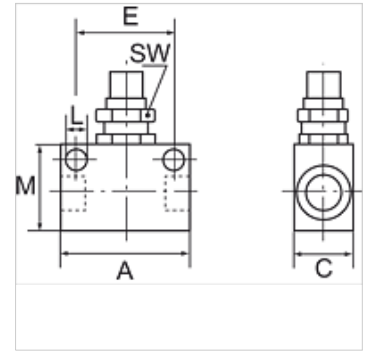


K-DRV 2

Unidirectional flow control valves

Caractéristiques

Pression de service	maxi 10 bar
Température de service	0 °C to +150 °C
Matériau étanche	FKM
Boîtier	Stainless steel 1.4404
Pièces internes	Stainless steel 1.4404

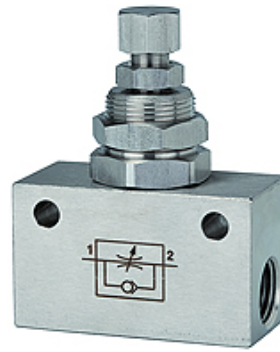

Remarque

Autres informations sur demande.

Description

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Article

Désignation	Filets	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22