


# K-DV 2

## Bidirectional flow control valves

### Caractéristiques

|                        |                        |
|------------------------|------------------------|
| Pression de service    | maxi 10 bar            |
| Température de service | 0 °C to +150 °C        |
| Pièces internes        | Stainless steel 1.4404 |
| Matériau étanche       | FKM                    |
| Boîtier                | Stainless steel 1.4404 |

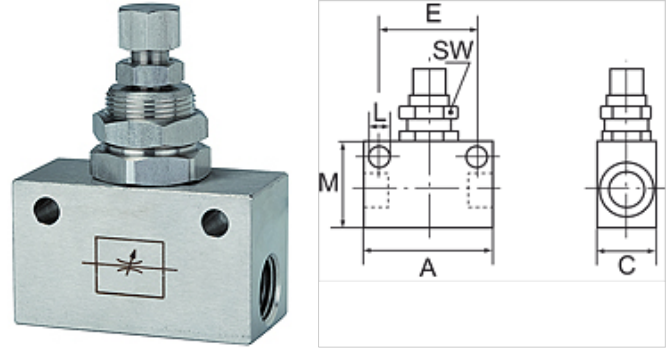

### Remarque

Autres informations sur demande.

### Description

Straight-way valves with restricted flow in both directions.

### Article

| Désignation    | Filets | A<br>(mm) | C<br>(mm) | E<br>(mm) | L<br>(mm) | M<br>(mm) | SW<br>(mm) |
|----------------|--------|-----------|-----------|-----------|-----------|-----------|------------|
| K- 07 30 12 47 | G 1/8  | 34,0      | 15,0      | 24,0      | 4,5       | 20,0      | 14         |
| K- 07 30 12 48 | G 1/4  | 50,0      | 25,0      | 35,0      | 5,5       | 30,0      | 22         |