


K-DV 2

Bidirectional flow control valves

Caractéristiques

| | |
|------------------------|------------------------|
| Pression de service | maxi 10 bar |
| Température de service | 0 °C to +150 °C |
| Pièces internes | Stainless steel 1.4404 |
| Matériau étanche | FKM |
| Boîtier | Stainless steel 1.4404 |

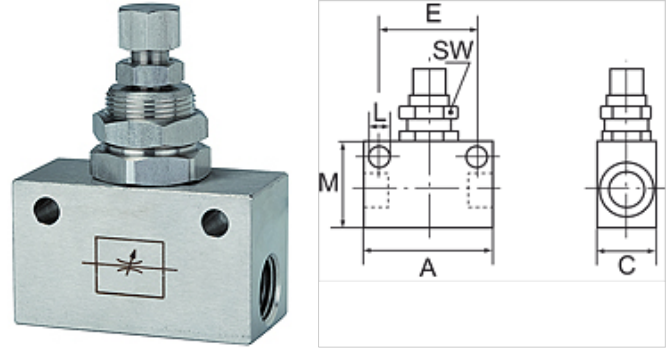

Remarque

Autres informations sur demande.

Description

Straight-way valves with restricted flow in both directions.

Article

| Désignation | Filets | A (mm) | C (mm) | E (mm) | L (mm) | M (mm) | SW (mm) |
|----------------|--------|-----------|-----------|-----------|-----------|-----------|------------|
| K- 07 30 12 47 | G 1/8 | 34,0 | 15,0 | 24,0 | 4,5 | 20,0 | 14 |
| K- 07 30 12 48 | G 1/4 | 50,0 | 25,0 | 35,0 | 5,5 | 30,0 | 22 |