

K-L-STECK STECKNIPPEL VB MINI

Union elbows with push-in plug, mini

HANSA FLEX

Caractéristiques

Pression de service Max. 10 bar, vacuum

Domaine d'utilisation Air, vacuum


Tuyaux recommandés PU or PA (nylon)

Médiums Air comprimé

Plage de température 0 °C to +60 °C

Matériau Plastic, Nickel plated brass

Bague de pression Plastic

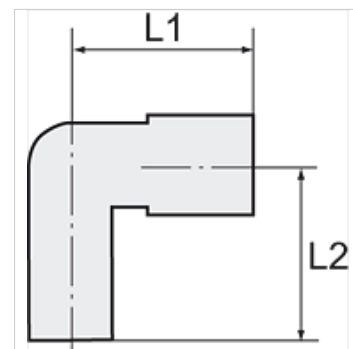

Remarque

Autres informations sur demande.

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	L2 (mm)	Mamelon embrochable (mm)
K- 07 40 50 07	3 mm	11,5	26,6	3
K- 07 40 50 08	4 mm	14,0	28,5	4
K- 07 40 50 09	6 mm	16,3	32,0	6