
K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

Caractéristiques

Matériau du tuyau	Polyurethane
Pression de service	maxi 10 bar
Température de service	-10 °C to +40 °C
Fixation	Wall, floor or ceiling
Entrée	Hose stem 8 mm



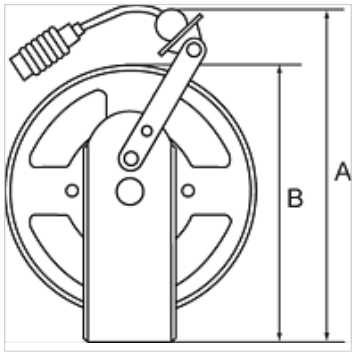

Remarque

Autres informations sur demande.

Description

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

Article

Désignation	Dimension de tuyau	A (mm)	B (mm)	Longueur de tuyau (m)
K- 07 10 06 24	10 mm x 6,5 mm	420,0	353,0	10
K- 07 10 06 25	10 mm x 6,5 mm	420,0	353,0	20
K- 07 10 06 26	12 mm x 8 mm	420,0	353,0	15
K- 07 10 06 27	16 mm x 11 mm	420,0	353,0	15

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.