

K-SCHL-AUFROLLER MOBIL

Hose reels for mobile applications

HANSA FLEX

Caractéristiques



Matériau du tuyau Polyurethane

Pression de service maxi 10 bar

Température de service -10 °C to +40 °C

Entrée Hose stem 8 mm

Filet de raccord Coupling G 3/8

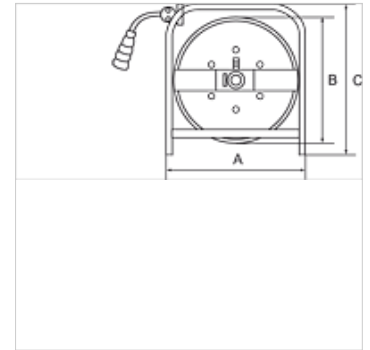

Remarque

Autres informations sur demande.

Description

Specially designed for mobile applications. This 50 m long polyurethane hose is mounted in a portable four-wheel cart made from blue anodised steel. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

Article

Désignation	Dimension de tuyau	A (mm)	B (mm)	C (mm)	Longueur de tuyau (m)
K- 07 10 06 16	12 mm x 8 mm	452,0	400,0	460,0	50