
K-DRUCKLUFTBEHAELTER
Compressed air tanks

Caractéristiques

Pression de service	max. 11 bar
Plage de température	-10 °C to +60 °C
Matériau	steel (FeP04), plastic coated



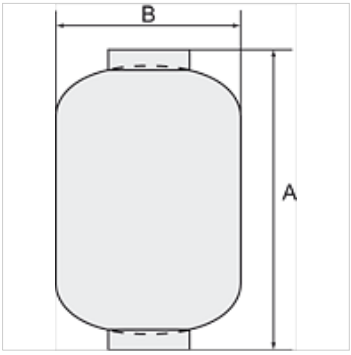

Remarque

Autres informations sur demande.

Description

Compact steel tanks in accordance with EU Directive 97/23

Article

Désignation	Contenance (L)	Raccord	A (mm)	B
K- 07 25 17 94	1,0	2 x G 1/2 female	225,0	85,0 mm
K- 07 25 17 95	2,5	2 x G 1/2 female	170,0	160,0 mm
K- 07 25 17 96	5,0	2 x G 1/2 female	184,0	210,0 mm
K- 07 25 17 97	7,0	2 x G 1/2 female	240,0	210,0 mm
K- 07 25 17 98	12,0	2 x G 1/2 female	365,0	229,0 mm

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.