

K-STECKVERBINDU ABSP

Stop unions

HANSA FLEX

Caractéristiques

Pression de service Max. 10 bar, vacuum

Domaine d'utilisation Air, vacuum

Tuyaux recommandés PU or PA (nylon)


Médiums Air comprimé

Plage de température 0 °C to +60 °C

Surface d'étanchéité O-ring (NBR)

Matériau Plastic, Nickel plated brass

Bague de pression Plastic

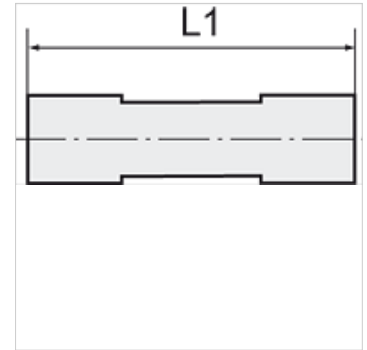

Remarque

Autres informations sur demande.

Description

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)
K- 07 40 08 59	4 mm	47,0
K- 07 40 08 60	6 mm	45,0
K- 07 40 08 61	8 mm	49,5
K- 07 40 08 62	10 mm	63,0
K- 07 40 08 63	12 mm	66,5