


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Caractéristiques

Pression d'entrée	Max. 10 bar
Plage de température	-10 °C to +50 °C
Médiums	Air comprimé
Indice de protection	IP 65
Pression de service	0.5 - 8 bar
Manocontact	Changeover contact
Largeur des pores de l'élément de filtre	20 µm
Mesure de la valeur du débit	At 6,3 bar and $\Delta p = 1$ bar

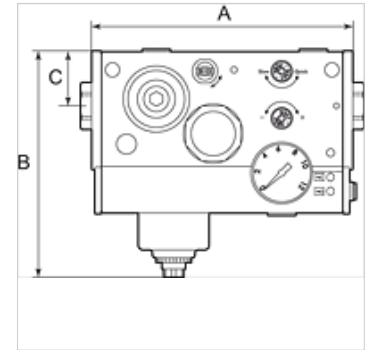

## Remarque

Autres informations sur demande.

## Description

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Informations relatives à la commande

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Article

Désignation	Raccord	Débit (L/min)	A (mm)	B	C (mm)	Tension
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)