


K-WTEH SERIE ONE M DRS

Service units, »ONE« Series, with pressure switch

HANSA FLEX

Caractéristiques

| | |
|--|-----------------------------------|
| Pression d'entrée | Max. 10 bar |
| Plage de température | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Indice de protection | IP 65 |
| Pression de service | 0.5 - 8 bar |
| Manocontact | Changeover contact |
| Largeur des pores de l'élément de filtre | 20 µm |
| Mesure de la valeur du débit | At 6,3 bar and $\Delta p = 1$ bar |

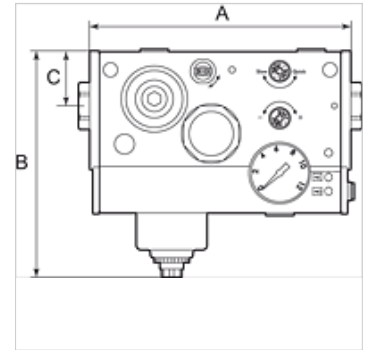

Remarque

Autres informations sur demande.

Description

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Informations relatives à la commande

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Article

| Désignation | Raccord | Débit (L/min) | A (mm) | B | C (mm) | Tension |
|----------------|---------|---------------|--------|----------|--------|--|
| K- 07 25 13 82 | G 1/4 | 2400 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 83 | G 3/8 | 3300 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 84 | G 1/2 | 4000 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |