

K-VSTO POM
Plugs

Caractéristiques

Pression de service	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Température de service	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Matériau	Acetalpolymerisat (POM)
Matériau étanche	NBR



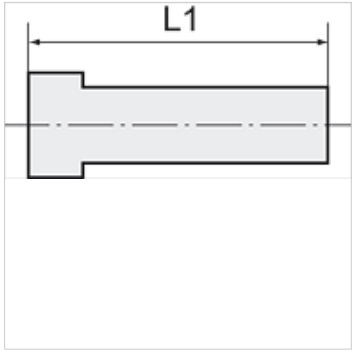

Remarque
Autres informations sur demande.

Description
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Article

Désignation	Couleur	L1 (mm)	Manchons (mm)
K- 07 40 29 11	rouge	28,0	4
K- 07 40 29 12	rouge	28,0	5
K- 07 40 29 13	rouge	30,0	6
K- 07 40 29 14	rouge	31,0	8
K- 07 40 29 15	rouge	36,5	10
K- 07 40 29 16	rouge	38,5	12
K- 07 40 29 17	noir	45,0	15
K- 07 40 29 18	noir	41,5	18
K- 07 40 29 19	noir	45,0	22
K- 07 40 29 20	noir	56,0	28

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.