



K-STECKVERBINDU ST RED 1

Reducers with push-in plug

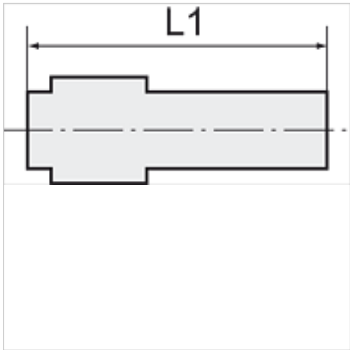

Caractéristiques	
Pression de service	Max. 16 bar
Température de service	-20 °C to +150 °C
Matériau	Laiton nickelé
Bague de pression	Nickel-plated brass
Circlip	Stainless steel



Remarque

Autres informations sur demande.

Description

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	Mamelon embrochable (mm)
K- 07 40 47 95	4 mm	29,5	6
K- 07 40 47 96	6 mm	32,5	8
K- 07 40 47 97	8 mm	38,5	10
K- 07 40 47 98	10 mm	41,0	12