

K-RD STUECKE PP

Reducers

HANSA FLEX


Caractéristiques

Pression de service on request

Température de service Max. +20 °C

Matériau Polypropylène (PP)

Matériau étanche NBR

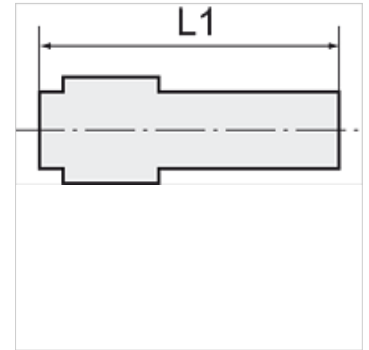

Remarque

Autres informations sur demande.

Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Article

| Désignation | pour Ø ext. du tuyau | L1 (mm) | Manchons (mm) |
|----------------|----------------------|------------|------------------|
| K- 07 40 29 00 | 22 mm | 127,0 | 32 |
| K- 07 40 29 01 | 28 mm | 133,3 | 32 |