

# K-RD STUECKE PP

Reducers

**HANSA FLEX**


## Caractéristiques

Pression de service on request

Température de service Max. +20 °C

Matériau Polypropylène (PP)

Matériau étanche NBR

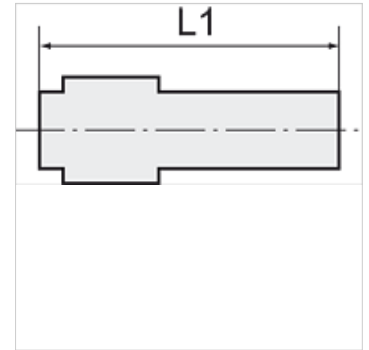

## Remarque

Autres informations sur demande.

## Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	Manchons (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32