
# K-RD STUECKE PP

Reducers

## Caractéristiques

| | |
|---|---|
| **Pression de service** | on request |
| **Température de service** | Max. +20 °C |
| **Matériau** | Polypropylene (PP) |
| **Matériau étanche** | NBR |



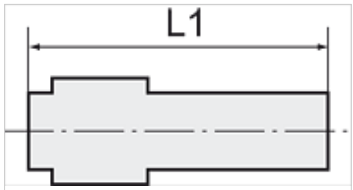


## Remarque

Autres informations sur demande.

## Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Article

| Désignation | pour Ø ext. du tuyau | L1 (mm) | Manchons (mm) |
|---|---|---|---|
| **K- 07 40 29 00** | 22 mm | 127,0 | 32 |
| **K- 07 40 29 01** | 28 mm | 133,3 | 32 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*