
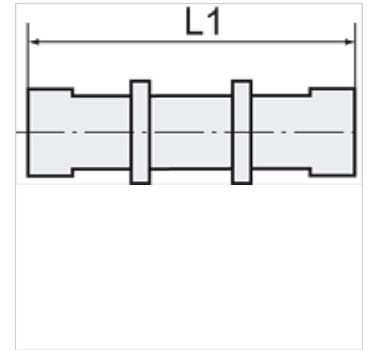


K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

Caractéristiques

Pression de service	Max. 10 bar, vacuum
Domaine d'utilisation	Air, vacuum
Tuyaux recommandés	PU or PA (nylon)
Médiums	Air comprimé
Norme	M thread acc. to DIN 13-1, with O-Ring
Plage de température	0 °C to +60 °C
Matériau	Plastic, Nickel plated brass
Bague de pression	Plastic



Remarque

Autres informations sur demande.

Description

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Article

Désignation	Filets	pour Ø ext. du tuyau	L1 (mm)	SW
K- 07 40 43 74	M 12 x 1.5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1,5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1,5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1,5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1,5	12 mm	62,2	27 mm