


K-MV G (NC) V 230 V, 50 HZ 1

Normally closed, (NC), pilot-operated, 230 V, 50 Hz

HANSA FLEX

Caractéristiques

Raccord électrique	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Indice de protection	IP 65
Température de fluide	max. 80 °C when using water or oils; max. 90 °C when using with air
Description filetage	G thread acc. DIN EN ISO 228-1
Boîtier, siège de vanne	Brass
Pièces internes	Stainless steel
Joint d'étanchéité	FPM

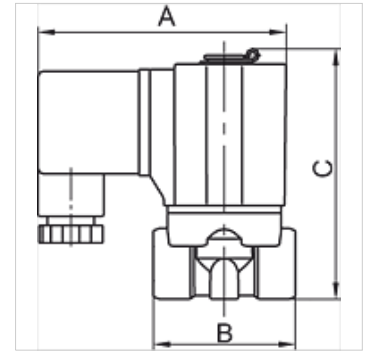

Remarque

Autres informations sur demande.

Description

Standard series in two different versions: Directly operated, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Article

Désignation	Filets	Pression de service max. (bar)	Pression de service mini (bar)	VN	A (mm)	B (mm)	C (mm)	Conception
K- 07 30 01 72	G 1/2	10	0,50	15,0	70,0	70,0	107,0	3
K- 07 30 01 73	G 3/4	10	0,50	20,0	70,0	82,0	115,4	3
K- 07 30 01 74	G 1	10	0,50	25,0	70,0	92,0	124,0	3