


Caractéristiques

| | |
|------------------------|-----------------|
| Pression de service | maxi 10 bar |
| Température de service | Max. 70 °C |
| Matériau étanche | NBR |
| Bâti | Aluminium |
| Pièces internes | Aluminium/Brass |

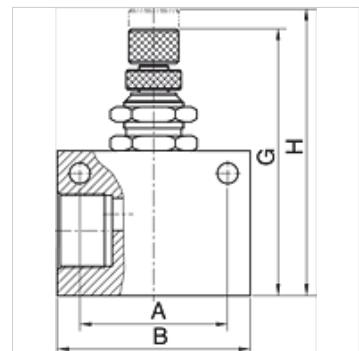

Remarque

Autres informations sur demande.

Article

| Désignation | Filets | A (mm) | B (mm) | G (mm) | H (mm) |
|---------------|--------|-----------|-----------|-----------|-----------|
| K-07 30 12 32 | G 1/8 | 22,0 | 32,0 | 46,90 | 52,3 |
| K-07 30 12 33 | G 1/4 | 26,0 | 36,0 | 50,80 | 56,3 |
| K-07 30 12 34 | G 3/8 | 35,0 | 50,0 | 65,00 | 74,0 |
| K-07 30 12 35 | G 1/2 | 35,0 | 50,0 | 65,00 | 74,0 |