K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

HANSA FLEX

Caractéristiques

Médiums	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Pression de service	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Plage de température	-20 °C to +80 °C
Tige de piston	Hardened steel, thick-chromed
Pistons	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Matériau étanche	NBR
Fût de vérin	Aluminium



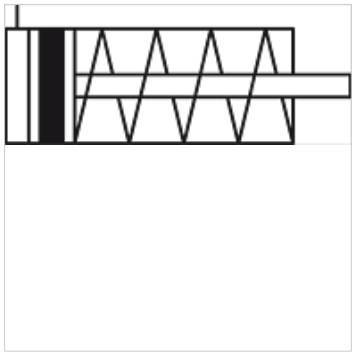

Description

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100
Series "ASQ", single-acting, Ø 12 - 63

Informations supplémentaires

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Article

Désignation	Ø pistons	Chariot élévateur (mm)	Conception	Ø tige de piston (mm)	Filetage entrée tige de piston
K- 07 15 13 33	12 mm	5	4	6	M 3 x 0.5
K- 07 15 13 34	12 mm	10	4	6	M 3 x 0.5
K- 07 15 13 35	12 mm	15	4	6	M 3 x 0.5
K- 07 15 13 36	12 mm	20	4	6	M 3 x 0.5
K- 07 15 13 37	16 mm	5	4	8	M 4 x 0.7
K- 07 15 13 38	16 mm	10	4	8	M 4 x 0.7
K- 07 15 13 39	16 mm	15	4	8	M 4 x 0.7
K- 07 15 13 40	16 mm	20	4	8	M 4 x 0.7
K- 07 15 13 41	20 mm	5	5	10	M 5 x 0.8
K- 07 15 13 42	20 mm	10	5	10	M 5 x 0.8
K- 07 15 13 43	20 mm	15	5	10	M 5 x 0.8
K- 07 15 13 44	20 mm	20	5	10	M 5 x 0.8
K- 07 15 13 45	20 mm	25	5	10	M 5 x 0.8
K- 07 15 13 46	20 mm	30	5	10	M 5 x 0.8
K- 07 15 13 47	25 mm	5	5	12	M 6 x 1
K- 07 15 13 48	25 mm	10	5	12	M 6 x 1
K- 07 15 13 49	25 mm	15	5	12	M 6 x 1
K- 07 15 13 50	25 mm	20	5	12	M 6 x 1
K- 07 15 13 51	25 mm	25	5	12	M 6 x 1
K- 07 15 13 52	25 mm	30	5	12	M 6 x 1
K- 07 15 13 53	32 mm	5	6	16	M 8 x 1.25
K- 07 15 13 54	32 mm	10	6	16	M 8 x 1.25
K- 07 15 13 55	32 mm	15	6	16	M 8 x 1.25
K- 07 15 13 56	32 mm	20	6	16	M 8 x 1.25
K- 07 15 13 57	32 mm	25	6	16	M 8 x 1.25
K- 07 15 13 58	32 mm	30	6	16	M 8 x 1.25
K- 07 15 13 59	40 mm	5	6	16	M 8 x 1.25
K- 07 15 13 60	40 mm	10	6	16	M 8 x 1.25
K- 07 15 13 61	40 mm	15	6	16	M 8 x 1.25
K- 07 15 13 62	40 mm	20	6	16	M 8 x 1.25
K- 07 15 13 63	40 mm	25	6	16	M 8 x 1.25
K- 07 15 13 64	40 mm	30	6	16	M 8 x 1.25
K- 07 15 13 65	50 mm	5	6	20	M 10 x 1.5
K- 07 15 13 66	50 mm	10	6	20	M 10 x 1.5
K- 07 15 13 67	50 mm	15	6	20	M 10 x 1.5
K- 07 15 13 68	50 mm	20	6	20	M 10 x 1.5
K- 07 15 13 69	50 mm	25	6	20	M 10 x 1.5

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.

K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

Article

Désignation	Ø pistons	Chariot élévateur (mm)	Conception	Ø tige de piston (mm)	Filetage entrée tige de piston
K- 07 15 13 70	50 mm	30	6	20	M 10 x 1.5
K- 07 15 13 71	63 mm	5	6	20	M 10 x 1.5
K- 07 15 13 72	63 mm	10	6	20	M 10 x 1.5
K- 07 15 13 73	63 mm	15	6	20	M 10 x 1.5
K- 07 15 13 74	63 mm	20	6	20	M 10 x 1.5
K- 07 15 13 75	63 mm	25	6	20	M 10 x 1.5
K- 07 15 13 76	63 mm	30	6	20	M 10 x 1.5

Accessoires

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.