


K-L-STECKVER L DREH MINI

Male elbows, long, swivel type, mini

HANSA FLEX

Caractéristiques

Pression de service	Max. 10 bar, vacuum
Domaine d'utilisation	Air, vacuum
Tuyaux recommandés	PU or PA (nylon)
Médiums	Air comprimé
Norme	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Plage de température	0 °C to +60 °C
Surface d'étanchéité	O-ring (NBR)
Matériau	Plastic, Nickel plated brass
Bague de pression	Plastic

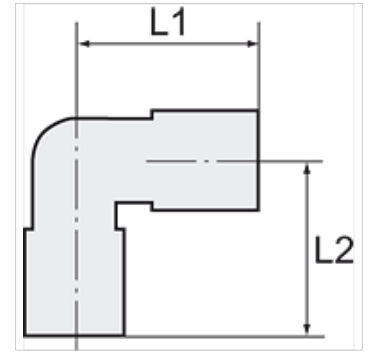

Remarque

Autres informations sur demande.

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Article

Désignation	Filets	pour Ø ext. du tuyau	L1 (mm)	L2 (mm)	SW
K- 07 40 23 53	M 3	3 mm	12,0	24,0	8 mm
K- 07 40 23 54	M 3	4 mm	14,0	29,2	8 mm
K- 07 40 23 55	M 5	3 mm	12,0	24,0	8 mm
K- 07 40 23 56	M 5	4 mm	14,0	29,2	8 mm
K- 07 40 23 57	M 5	6 mm	16,0	29,2	8 mm
K- 07 40 23 58	M 6	3 mm	12,0	24,5	10 mm
K- 07 40 23 59	M 6	4 mm	14,0	29,6	10 mm
K- 07 40 23 60	M 6	6 mm	16,0	29,6	10 mm
K- 07 40 23 61	G 1/8	4 mm	14,0	28,5	14 mm
K- 07 40 23 62	G 1/8	6 mm	16,0	28,5	14 mm
K- 07 40 23 63	R 1/8	4 mm	14,0	30,0	10 mm
K- 07 40 23 64	R 1/8	6 mm	16,0	30,0	10 mm