

K-ODER-VENTIL
OR valves

Caractéristiques

Pression de service	2 - 10 bar
Plage de température	-10 °C to +80 °C
Débit à 6,3 bar et Δ 1 bar	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
Corps de vanne	Aluminium
Sphère	Stainless steel
Joints	NBR



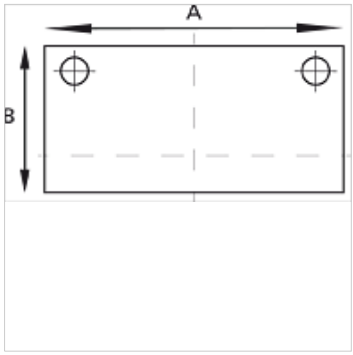

Remarque

Autres informations sur demande.

Description

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Article

Désignation	Filets	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.