

# K-STECKVERBINDU RED

Reducers

## Caractéristiques

| | |
|---|---|
| **Pression de service** | Max. 16 bar |
| **Température de service** | -20 °C to +150 °C |
| **Matériau** | Laiton nickelé |
| **Bague de pression** | Nickel-plated brass |
| **Circlip** | Stainless steel |



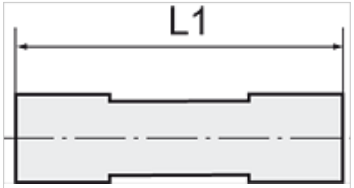


## Remarque

Autres informations sur demande.

## Description

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Article

| Désignation | pour Ø ext. du tuyau | L1 (mm) |
|---|---|---|
| **K- 07 40 47 75** | 6 mm / 4 mm | 33,0 |
| **K- 07 40 47 76** | 8 mm / 6 mm | 39,0 |
| **K- 07 40 47 77** | 10 mm / 8 mm | 39,5 |
| **K- 07 40 47 78** | 12 mm / 10 mm | 41,5 |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*