

K-STECKVERBINDU RED

Reducers

Caractéristiques

Pression de service	Max. 16 bar
Température de service	-20 °C to +150 °C
Matériau	Laiton nickelé
Bague de pression	Nickel-plated brass
Circlip	Stainless steel



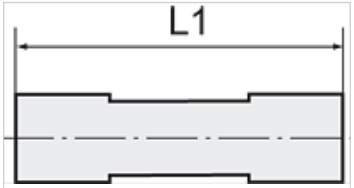

Remarque

Autres informations sur demande.

Description

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Article

Désignation	pour Ø ext. du tuyau	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.