
# K-L-STECKVER AG-K


Male elbows, conical male thread

HANSA FLEX

## Caractéristiques

| | |
|---|---|
| **Pression de service** | Max. 16 bar |
| **Température de service** | -20 °C to +80 °C |
| **Matériau** | Laiton nickelé |
| **Bague de pression** | Hostaform |
| **Circlip** | Stainless steel |



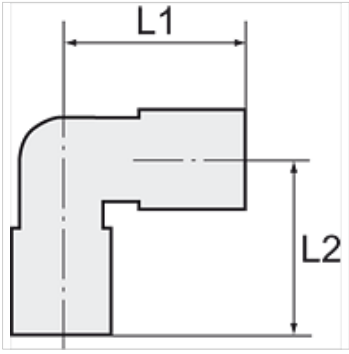


## Remarque

Autres informations sur demande.

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Article

| Désignation | Filets | pour Ø ext. du tuyau | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 25 65** | R 1/8 | 4 mm | 18,6 | 16,0 | 10 mm |
| **K- 07 40 25 66** | R 1/8 | 6 mm | 21,9 | 16,0 | 10 mm |
| **K- 07 40 25 67** | R 1/8 | 8 mm | 25,4 | 16,0 | 10 mm |
| **K- 07 40 25 63** | R 1/4 | 6 mm | 21,9 | 18,5 | 10 mm |
| **K- 07 40 25 64** | R 1/4 | 8 mm | 25,4 | 18,5 | 10 mm |
| **K- 07 40 25 62** | R 1/4 | 10 mm | 27,2 | 22,0 | 14 mm |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*