


# K-STECKNIPPEL

push-in plug

**HANSA FLEX**

## Caractéristiques

|                        |                  |
|------------------------|------------------|
| Pression de service    | Max. 16 bar      |
| Température de service | -20 °C to +80 °C |
| Matériau               | Laiton nickelé   |

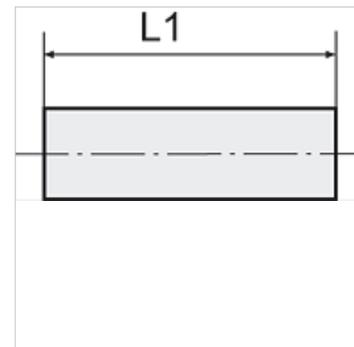

## Remarque

Autres informations sur demande.

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Article

| Désignation    | pour Ø ext. du tuyau | L1<br>(mm) |
|----------------|----------------------|------------|
| K- 07 40 47 53 | 4 mm                 | 34,0       |
| K- 07 40 47 54 | 5 mm                 | 34,0       |
| K- 07 40 47 55 | 6 mm                 | 37,5       |
| K- 07 40 47 56 | 8 mm                 | 37,5       |
| K- 07 40 47 57 | 10 mm                | 45,0       |
| K- 07 40 47 58 | 12 mm                | 48,0       |
| K- 07 40 47 59 | 14 mm                | 58,0       |