# K-STECKVERSCHR AGR OR SK

Male connectors, parallel male thread with O-ring and outer hex

HANSA FLEX

## Caractéristiques

| | |
|---|---|
| **Pression de service** | Max. 15 bar, coarse vacuum |
| **Domaine d'utilisation** | Air, vacuum |
| **Tuyaux recommandés** | PU or PA (nylon) |
| **Médiums** | Compressed air and all gases or liquids that are compatible with the materials |
| **Plage de température** | -20 °C to +80 °C |
| **Surface d'étanchéité** | Parallel version: O-ring in housing |
| **Matériau** | Plastic, Nickel plated brass |
| **Bague de pression** | Plastic |



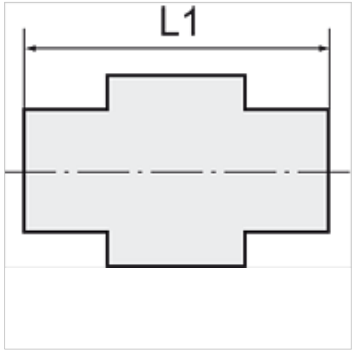


## Remarque

Autres informations sur demande.

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Article

| Désignation | Filets | pour Ø ext. du tuyau | six pans creux (mm) | L1 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 00 78** | M 5 | 4 mm | 2,0 | 20,8 | 10 mm |
| **K- 07 40 00 79** | M 5 | 6 mm | 2,0 | 22,2 | 12 mm |
| **K- 07 40 00 92** | G 1/8 | 4 mm | 3,0 | 19,3 | 10 mm |
| **K- 07 40 00 93** | G 1/8 | 6 mm | 4,0 | 20,2 | 12 mm |
| **K- 07 40 00 94** | G 1/8 | 8 mm | 5,0 | 27,1 | 14 mm |
| **K- 07 40 00 90** | G 1/8 | 10 mm | 5,0 | 28,9 | 17 mm |
| **K- 07 40 00 91** | G 1/8 | 12 mm | 5,0 | 31,6 | 21 mm |
| **K- 07 40 00 87** | G 1/4 | 4 mm | 3,0 | 17,4 | 10 mm |
| **K- 07 40 00 88** | G 1/4 | 6 mm | 4,0 | 20,9 | 12 mm |
| **K- 07 40 00 89** | G 1/4 | 8 mm | 6,0 | 23,0 | 14 mm |
| **K- 07 40 00 85** | G 1/4 | 10 mm | 6,0 | 29,9 | 17 mm |
| **K- 07 40 00 86** | G 1/4 | 12 mm | 6,0 | 32,6 | 21 mm |
| **K- 07 40 00 98** | G 3/8 | 6 mm | 4,0 | 19,5 | 12 mm |
| **K- 07 40 00 99** | G 3/8 | 8 mm | 6,0 | 22,1 | 14 mm |
| **K- 07 40 00 95** | G 3/8 | 10 mm | 8,0 | 25,9 | 17 mm |
| **K- 07 40 00 96** | G 3/8 | 12 mm | 8,0 | 28,6 | 21 mm |
| **K- 07 40 00 97** | G 3/8 | 16 mm | 8,0 | 36,1 | 24 mm |
| **K- 07 40 00 83** | G 1/2 | 6 mm | 4,0 | 22,6 | 12 mm |
| **K- 07 40 00 84** | G 1/2 | 8 mm | 6,0 | 23,2 | 14 mm |
| **K- 07 40 00 80** | G 1/2 | 10 mm | 8,0 | 24,5 | 17 mm |
| **K- 07 40 00 81** | G 1/2 | 12 mm | 8,0 | 31,1 | 21 mm |
| **K- 07 40 00 82** | G 1/2 | 16 mm | 10,0 | 38,1 | 24 mm |

*En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.*