


K-L-STECK VB 10BAR

Union elbows (pressure max. 10 bar)

HANSA FLEX

Caractéristiques

| | |
|-----------------------|--|
| Pression de service | Max. 10 bar |
| Domaine d'utilisation | Air, vacuum |
| Tuyaux recommandés | PU or PA (nylon) |
| Médiums | Compressed air and all gases or liquids that are compatible with the materials |
| Plage de température | -20 °C to +80 °C |
| Matériau | Plastic, Nickel plated brass |
| Bague de pression | Plastic |

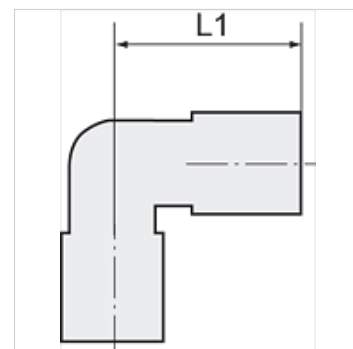

Remarque

Autres informations sur demande.

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Article

| Désignation | pour Ø ext. du tuyau | L1 (mm) |
|----------------|----------------------|------------|
| K- 07 40 03 50 | 4 mm | 17,5 |
| K- 07 40 03 51 | 6 mm | 18,7 |
| K- 07 40 03 52 | 8 mm | 22,4 |
| K- 07 40 03 53 | 10 mm | 27,2 |
| K- 07 40 03 54 | 12 mm | 28,9 |
| K- 07 40 41 38 | 14 mm | 29,8 |
| K- 07 40 03 55 | 16 mm | 30,8 |