


# K-X-STECKVERBINDUNG

X-unions

**HANSA FLEX**

## Caractéristiques

|                       |  |
|-----------------------|--|
| Pression de service   | Max. 15 bar, coarse vacuum   |
| Domaine d'utilisation | Air, vacuum  |
| Tuyaux recommandés    | PU or PA (nylon)   |
| Médiums               | Compressed air and all gases or liquids that are compatible with the materials |
| Plage de température  | -20 °C to +80 °C   |
| Matériau              | Plastic, Nickel plated brass   |
| Bague de pression     | Plastic  |

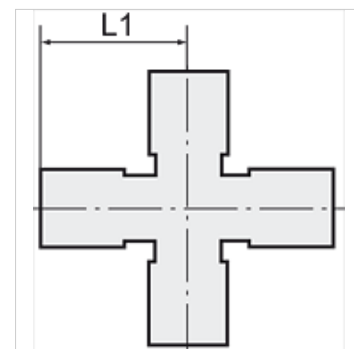

## Remarque

Autres informations sur demande.

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Article

| Désignation    | pour Ø ext. du tuyau | L1<br>(mm) |
|----------------|----------------------|------------|
| K- 07 40 03 70 | 4 mm                 | 17,5       |
| K- 07 40 03 71 | 6 mm                 | 19,0       |
| K- 07 40 03 72 | 8 mm                 | 22,8       |
| K- 07 40 03 73 | 10 mm                | 27,9       |
| K- 07 40 03 74 | 12 mm                | 29,3       |