


## Caractéristiques

<b>Pression de service</b>	Max. 15 bar, coarse vacuum
<b>Domaine d'utilisation</b>	Air, vacuum
<b>Tuyaux recommandés</b>	PU or PA (nylon)
<b>Médiums</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Plage de température</b>	-20 °C to +80 °C
<b>Surface d'étanchéité</b>	Parallel version: O-ring in housing, Conical version: thread coating
<b>Matériau</b>	Plastic, Nickel plated brass
<b>Bague de pression</b>	Plastic

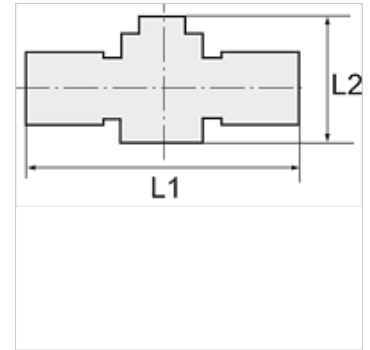

## Remarque

Autres informations sur demande.

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Article

Désignation	Filetage 1	Filetage 2	L1 (mm)	L2 (mm)	SW
K- 07 40 07 81	R 1/8	R 1/8	65,0	42,6	12 mm
K- 07 40 07 80	R 1/4	R 1/8	67,5	42,6	14 mm / 12 mm
K- 07 40 07 79	R 1/4	R 1/4	70,0	42,6	14 mm
K- 07 40 07 82	R 3/8	R 1/4	82,0	47,0	17 mm / 14 mm
K- 07 40 07 83	R 3/8	R 3/8	83,5	47,0	17 mm
K- 07 40 07 78	R 1/2	R 3/8	87,0	47,0	21 mm / 17 mm
K- 07 40 07 77	R 1/2	R 1/2	90,5	47,0	21 mm