

# K-Y-STECK VB STECKNIP MINI

Y unions with push-in plug, mini

**HANSA FLEX**

## Caractéristiques

**Pression de service** Max. 10 bar, vacuum

**Domaine d'utilisation** Air, vacuum


**Tuyaux recommandés** PU or PA (nylon)

**Médiums** Air comprimé

**Plage de température** 0 °C to +60 °C

**Matériau** Plastic, Nickel plated brass

**Bague de pression** Plastic

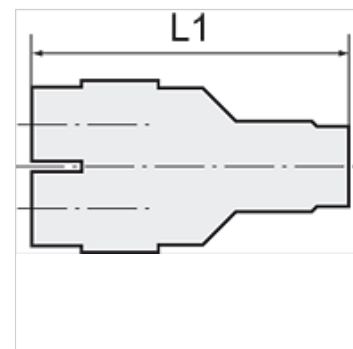

## Remarque

Autres informations sur demande.

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Article

Désignation	pour Ø ext. du tuyau	L1 (mm)	Mamelon embrochable (mm)
K- 07 40 50 25	3 mm	38,0	3
K- 07 40 50 26	4 mm	43,0	4
K- 07 40 50 27	6 mm	46,0	6