


K-Y-WINKELVERSCH DRE AG OR

Male branch Y-elbows with outer hex, swivel type, parallel male thread with O-ring

HANSA FLEX

Caractéristiques

| | |
|------------------------------|--|
| Pression de service | Max. 15 bar, coarse vacuum |
| Domaine d'utilisation | Air, vacuum |
| Tuyaux recommandés | PU or PA (nylon) |
| Médiums | Compressed air and all gases or liquids that are compatible with the materials |
| Plage de température | -20 °C to +80 °C |
| Surface d'étanchéité | Parallel version: O-ring in housing |
| Matériau | Plastic, Nickel plated brass |
| Bague de pression | Plastic |

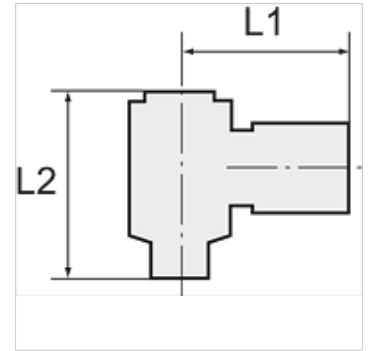

Remarque

Autres informations sur demande.

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Article

| Désignation | Filets | pour Ø ext. du tuyau | L1 (mm) | L2 (mm) | SW |
|----------------|--------|----------------------|------------|------------|-------|
| K- 07 40 43 07 | M 5 | 4 mm | 24,0 | 22,0 | 12 mm |
| K- 07 40 43 10 | G 1/8 | 6 mm | 24,0 | 25,0 | 12 mm |
| K- 07 40 43 09 | G 1/4 | 8 mm | 28,5 | 28,8 | 14 mm |
| K- 07 40 43 11 | G 3/8 | 10 mm | 33,7 | 34,8 | 19 mm |
| K- 07 40 43 08 | G 1/2 | 12 mm | 37,5 | 42,1 | 24 mm |