K-STECKVERBINDU RED 1


Reducers

HANSA-FLEX

Caractéristiques

Pression de service	Max. 16 bar
Température de service	-20 °C to +80 °C
Matériau	Laiton nickelé
Bague de pression	Hostaform
Circlip	Stainless steel



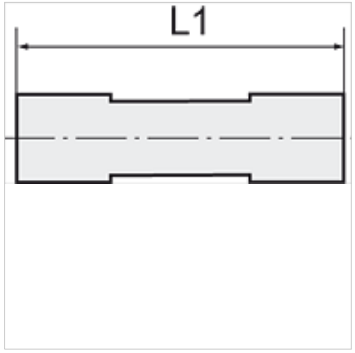

Remarque

Autres informations sur demande.

Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Article

Désignation	Filets	pour Ø ext. du tuyau	L1 (mm)
K- 07 40 25 26	M 13 x 1	4 mm / 6 mm	32,7
K- 07 40 25 27	M 15 x 1	4 mm / 8 mm	34,4
K- 07 40 25 28	M 15 x 1	6 mm / 8 mm	35,0
K- 07 40 25 29	M 17 x 1	6 mm / 10 mm	37,5
K- 07 40 25 30	M 20 x 1	6 mm / 12 mm	39,0
K- 07 40 25 31	M 17 x 1	8 mm / 10 mm	37,8
K- 07 40 25 32	M 20 x 1	8 mm / 12 mm	40,1
K- 07 40 25 33	M 20 x 1	10 mm / 12 mm	40,8

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.