

K-SCHMUTZFAENGER MS BL

Strainers - brass

Caractéristiques

Pression de service	maxi 20 bar
Température de service	-20 °C to +110 °C
Description filetage	G-thread acc. ISO 228-1, tolerance class B
Crépine	Stainless steel, mesh size 0.5 mm
Boîtier	Brass with a bare metal surface
Tête	Brass with a bare metal surface
Joints	NBR O-ring



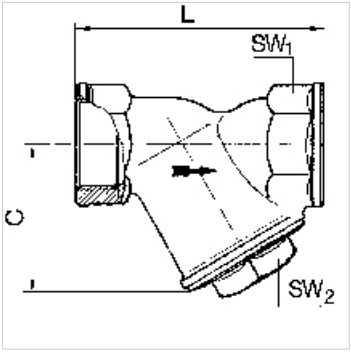

Remarque

Autres informations sur demande.

Description

Suitable for domestic water services, heating and air conditioning plants or compressed air systems. Not suitable for steam.

Article

Désignation	DN	Filets	C (mm)	L (mm)	SW1 (mm)	SW2 (mm)
K- 07 30 29 93	8	G 1/4	40,0	55,0	18	20
K- 07 30 29 94	10	G 3/8	40,0	55,0	21	20
K- 07 30 29 95	15	G 1/2	40,0	58,0	25	20
K- 07 30 29 96	20	G 3/4	48,0	70,0	31	27
K- 07 30 29 97	25	G 1	56,0	87,0	38	32
K- 07 30 29 98	32	G 1 1/4	64,0	96,0	47	36
K- 07 30 29 99	40	G 1 1/2	73,0	106,0	57	38
K- 07 30 30 00	50	G 2	89,0	126,0	67	46

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.