
K-SCHL-AUFROLLER STANDARD


Hose reel - standard type

HANSA FLEX

Caractéristiques

Matériau du tuyau	Polyurethane (PUR)
Température de service	max +40 °C
Application	for compressed air and water
Angle de pivotement	150°



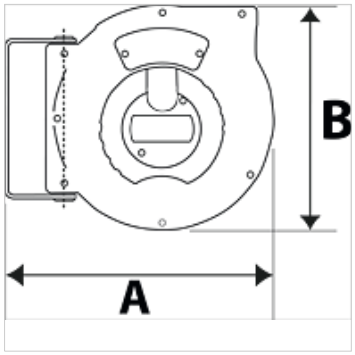

Remarque

Autres informations sur demande.

Description

Hose reel with automatic rewind and spring assembly. Robust hose locking mechanism, impact resistant plastic casing. Swivel wall mount made made from coated steel. Easy mounting on the wall or ceiling.

Article

Désignation	Dimension de tuyau	A (mm)	B (mm)	Filetage en sortie	Filetage en entrée	Pression de service max. (bar)	Longueur de tuyau (m)
K- 07 10 11 03	12 mm x 8 mm	325,0	275,0	G 1/4 AG	G 1/4 fem	10	9
K- 07 10 11 04	12 mm x 8 mm	355,0	315,0	G 1/4 AG	G 1/4 fem	15	12

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.