


K-3WSV ELKT HANSA PRO

3/2-way poppet valve, electrically actuated, for HANSA PRO

HANSA FLEX

Caractéristiques

| | |
|-----------------------|--|
| Température de fluide | -10 °C to +50 °C |
| Température ambiante | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Indice de protection | IP 65 acc. to DIN 40050 |
| Mode de fixation | Line mounting, mounting kit or wall mounting |
| Actionnement | electrical |
| Domaine de pression | 2 - 10 bar |
| Position de montage | Any |
| Débit nominal G 1/2 | 5.200 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal G 3/8 | 4.300 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE maxi 11 | 10 bar |
| Boîtier | PA66 |

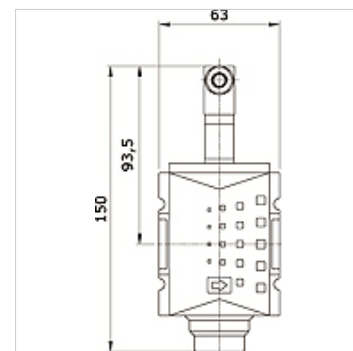

Article

| Désignation | Raccord | Tension nominale / type de courant | Gabarit |
|----------------|---------|------------------------------------|---------|
| K- 07 25 22 48 | G 3/8 i | 24 V DC | 2 |
| K- 07 25 22 49 | G 3/8 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 50 | G 3/8 i | 230 V AC 50 Hz | 2 |
| K- 07 25 22 51 | G 1/2 i | 24 V DC | 2 |
| K- 07 25 22 52 | G 1/2 i | 115 V AC 50 Hz | 2 |
| K- 07 25 22 53 | G 1/2 i | 230 V AC 50 Hz | 2 |