


K-VERTEILER 3-FACH HANSA PRO

Distributor 3-fold with pressure switch, HANSA PRO

HANSA FLEX

Caractéristiques

| | |
|-------------------------------|--|
| Température de fluide | -10 °C to +50 °C |
| Température ambiante | -10 °C to +50 °C |
| Médiums | Air comprimé |
| Mode de fixation | Line mounting, mounting kit or wall mounting |
| Position de montage | Any |
| Plage de réglage | 0,3 - 2 bar |
| Débit nominal G 1/2 | 11.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal G 3/8 | 7.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal arrière (P - E) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal haut (P - D) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal bas (P - B) | 5.500 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Débit nominal avant (P - C) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE maxi 11 | 16 bar |
| Boîtier | PA66 |

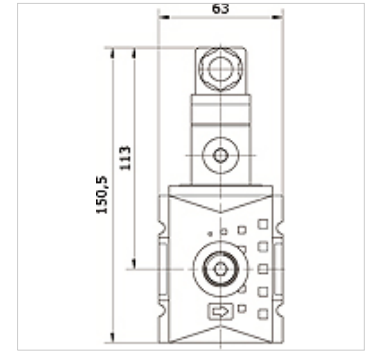

Article

| Désignation | Raccord P + A | Raccord B | Raccord C | Raccord D | Raccord E | Pression d'éclatement (bar) | Gabarit |
|----------------|---------------|-----------|-----------|-----------|-----------|-----------------------------|---------|
| K- 07 25 22 38 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 5 | 2 |
| K- 07 25 22 39 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 10 | 2 |
| K- 07 25 22 40 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 20 | 2 |
| K- 07 25 22 41 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 25 | 2 |
| K- 07 25 22 42 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 5 | 2 |
| K- 07 25 22 43 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 10 | 2 |
| K- 07 25 22 44 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 20 | 2 |
| K- 07 25 22 45 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 25 | 2 |