



# K-EST 12 MS

Male stems for coupling NW12 MS

**HANSA FLEX**

## Caractéristiques

|                       |                                 |
|-----------------------|---------------------------------|
| Pression de service   | 10 bar                          |
| Température de fluide | max. +90 °C                     |
| Température ambiante  | Max. +90 °C                     |
| Matériau              | Brass with a bare metal surface |

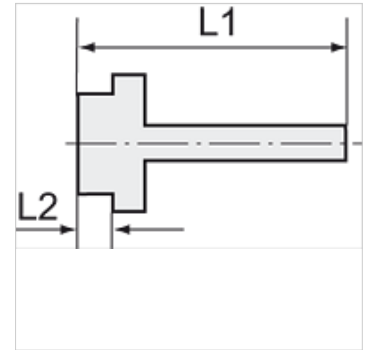

## Remarque

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Autres informations sur demande.

## Informations supplémentaires

Further types and dimensions on request.

## Article

| Désignation    | Filets | pour tuyau | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|--------|------------|------------|------------|-------|
| K- 07 35 00 88 | G 1/2  | LW 16 mm   | 58,0       | 10,0       | 20 mm |