

K-W90 VERBINDER MS NI

Union elbows


HANSA FLEX

Caractéristiques

Pression de service Max. 18 bar

Matériau étanche Buna-N

Matériau Laiton nickelé

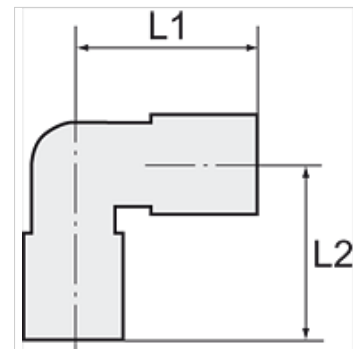

Remarque

Autres informations sur demande.

Article

| Désignation | pour tuyau | L1 (mm) | SW |
|----------------|---------------|------------|-------|
| K- 07 40 31 77 | 4 mm / 2 mm | 24,5 | 9 mm |
| K- 07 40 31 78 | 5 mm / 3 mm | 21,5 | 8 mm |
| K- 07 40 31 79 | 6 mm / 4 mm | 22,0 | 9 mm |
| K- 07 40 31 80 | 8 mm / 6 mm | 22,0 | 12 mm |
| K- 07 40 31 75 | 10 mm / 8 mm | 25,0 | 12 mm |
| K- 07 40 31 76 | 12 mm / 10 mm | 30,0 | 14 mm |