


# TN VA

Uvrtni vijčani spoj, T oblik

**HANSA FLEX**

## Karakteristike

|                          |   |
|--------------------------|---|
| <b>Priključak 1</b>      | NPT vanjski navoji                                |
| <b>Oblik brtve 1</b>     | brtvljenje navoja                                 |
| <b>Priključak 2 + 3</b>  | metrički vanjski navoji, cilindrični              |
| <b>Oblik brtve 2 + 3</b> | 24° unutarnji konus                               |
| <b>Izvedba</b>           | Uvrtni vijčani spoj                               |
| <b>Oblik izrade</b>      | T oblik   |
| <b>Norma</b>             | DIN 3865  |
| <b>Opseg isporuke</b>    | Nastavak s pretornom maticom i narezanim prstenom |
| <b>Materijal</b>         | Oplemenjeni čelik                                 |

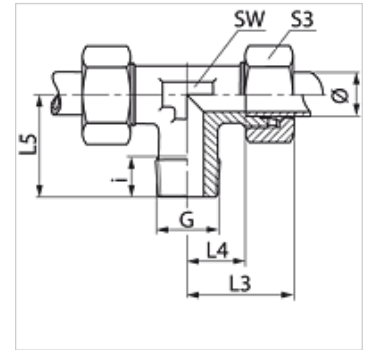

## Napomena

Upute za montažu, ugradnju, tlačno opterećenje i dopuštene radne temperature pronaći ćete u tehničkim informacijama za vijčane spojeve cijevi.

## Artikli

| Naziv              | Serija | Radni tlak bari | Vanjski Ø cijevi (mm) | G                 | i (mm) | L3 (mm) | L4 (mm) | L5 (mm) | SW (mm) | S3 |
|--------------------|--------|-----------------|-----------------------|-------------------|--------|---------|---------|---------|---------|----|
| TN 06 LL VA        | LL     | PN 100          | 6                     | 1/8" -27 NPT      | 8      | 21      | 9,5     | 17      | 9       | 12 |
| TN 08 LL VA        | LL     | PN 100          | 8                     | 1/8" -27 NPT      | 8      | 23      | 11,5    | 20      | 12      | 14 |
| TN NW 04 HL VA     | L      | PN 315          | 6                     | 1/8" -27 NPT      | 8      | 27      | 12,0    | 20      | 12      | 14 |
| TN NW 04 HL 1/4 VA | L      | PN 315          | 6                     | 1/4" - 18 NPT     | 10     | 27      | 12,0    | 20      | 12      | 14 |
| TN NW 06 HL VA     | L      | PN 315          | 8                     | 1/4" - 18 NPT     | 12     | 29      | 14,0    | 26      | 12      | 17 |
| TN NW 08 HL VA     | L      | PN 315          | 10                    | 1/4" - 18 NPT     | 12     | 30      | 15,0    | 27      | 14      | 19 |
| TN NW 08 HL 3/8 VA | L      | PN 315          | 10                    | 3/8" - 18 NPT     | 15     | 30      | 15,0    | 27      | 14      | 19 |
| TN NW 08 HL 1/2 VA | L      | PN 315          | 10                    | 1/2" - 14 NPT     | 20     | 37      | 21,0    | 33      | 17      | 19 |
| TN NW 10 HL 1/4 VA | L      | PN 315          | 12                    | 1/4" - 18 NPT     | 15     | 32      | 17,0    | 28      | 17      | 22 |
| TN NW 10 HL VA     | L      | PN 315          | 12                    | 3/8" - 18 NPT     | 12     | 32      | 17,0    | 28      | 17      | 22 |
| TN NW 10 HL 1/2 VA | L      | PN 315          | 12                    | 1/2" - 14 NPT     | 20     | 36      | 21,0    | 34      | 17      | 22 |
| TN NW 13 HL VA     | L      | PN 315          | 15                    | 1/2" - 14 NPT     | 14     | 36      | 21,0    | 34      | 19      | 27 |
| TN NW 16 HL VA     | L      | PN 315          | 18                    | 1/2" - 14 NPT     | 14     | 40      | 23,5    | 36      | 24      | 32 |
| TN NW 20 HL VA     | L      | PN 160          | 22                    | 3/4" - 14 NPT     | 16     | 44      | 27,5    | 42      | 27      | 36 |
| TN NW 25 HL VA     | L      | PN 160          | 28                    | 1" -11,5 NPT      | 16     | 47      | 30,5    | 48      | 36      | 41 |
| TN NW 32 HL VA     | L      | PN 160          | 35                    | 1,1/4" - 11,5 NPT | 20     | 56      | 34,5    | 54      | 41      | 50 |
| TN NW 40 HL VA     | L      | PN 160          | 42                    | 1,1/2" - 11,5 NPT | 22     | 63      | 40,0    | 61      | 50      | 60 |
| TN NW 03 HS VA     | S      | PN 630          | 6                     | 1/4" - 18 NPT     | 12     | 31      | 16,0    | 26      | 12      | 17 |
| TN NW 04 HS VA     | S      | PN 630          | 8                     | 1/4" - 18 NPT     | 12     | 32      | 17,0    | 27      | 14      | 19 |
| TN NW 06 HS VA     | S      | PN 630          | 10                    | 3/8" - 18 NPT     | 12     | 34      | 17,5    | 28      | 17      | 22 |
| TN NW 08 HS VA     | S      | PN 630          | 12                    | 3/8" - 18 NPT     | 12     | 38      | 21,5    | 28      | 17      | 24 |
| TN NW 08 HS 1/2 VA | S      | PN 315          | 12                    | 1/2" - 14 NPT     | 20     | 39      | 21,5    | 34      | 19      | 24 |
| TN NW 10 HS VA     | S      | PN 630          | 14                    | 1/2" - 14 NPT     | 14     | 40      | 22,0    | 32      | 19      | 27 |
| TN NW 13 HS VA     | S      | PN 400          | 16                    | 1/2" - 14 NPT     | 14     | 43      | 24,5    | 32      | 24      | 30 |
| TN NW 16 HS VA     | S      | PN 400          | 20                    | 3/4" - 14 NPT     | 16     | 48      | 26,5    | 42      | 27      | 36 |
| TN NW 20 HS VA     | S      | PN 400          | 25                    | 1" -11,5 NPT      | 18     | 54      | 30,0    | 48      | 36      | 46 |
| TN NW 25 HS VA     | S      | PN 400          | 30                    | 1,1/4" - 11,5 NPT | 20     | 62      | 35,5    | 54      | 41      | 50 |
| TN NW 32 HS VA     | S      | PN 315          | 38                    | 1,1/2" - 11,5 NPT | 22     | 72      | 41,0    | 61      | 50      | 60 |

Serija: LL = veoma lagan L = lagan S = težak - PN = nazivni tlak PB = maks. radni tlak - Ø = vanjski promjer cijevi

## Varijante proizvoda

|        |   |
|--------|---|
| TN     | Uvrtni vijčani spoj, T oblik, Čelik             |
| XTN VA | Uvrtni vijčani spoj, T oblik, Oplemenjeni čelik |