


Karakteristike

| | |
|--------------------|----------------------------------|
| Priključak 1 | BSP unutarnji navoj, cilindrični |
| Izvedba | Protumatica |
| Norma | ISO 8434- 3 |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

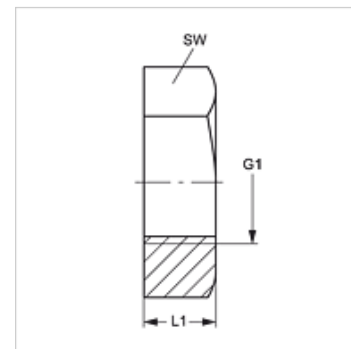

Artikl

| Naziv | G1 | L1 (mm) | SW (mm) |
|-----------|---------------|------------|------------|
| KM 02 BSP | G 1/8" - 28 | 5 | 14 |
| KM 04 BSP | G 1/4" - 19 | 6 | 19 |
| KM 06 BSP | G 3/8" - 19 | 7 | 22 |
| KM 08 BSP | G 1/2" -14 | 8 | 27 |
| KM 10 BSP | G 5/8" -14 | 7 | 30 |
| KM 12 BSP | G 3/4" -14 | 9 | 32 |
| KM 16 BSP | G 1" -11 | 10 | 41 |
| KM 20 BSP | G 1,1/4" - 11 | 13 | 50 |
| KM 24 BSP | G 1,1/2" - 11 | 15 | 55 |
| KM 32 BSP | G 2" -11 | 15 | 70 |

SW = širina ključa