


LOET HB

Nastavak za lemljenje AGR

HANSA FLEX

Karakteristike

| | |
|--------------------|--------------------------------|
| Priključak 1 | Lemljeni spoj |
| Priključak 2 | BSP vanjski navoj, cilindrični |
| Oblik brtve 2 | 60° unutarnji konus |
| Izvedba | Nastavak za lemljenje |
| Oblik izrade | ravno |
| Materijal | Čelik |
| Površinska zaštita | nauljen |

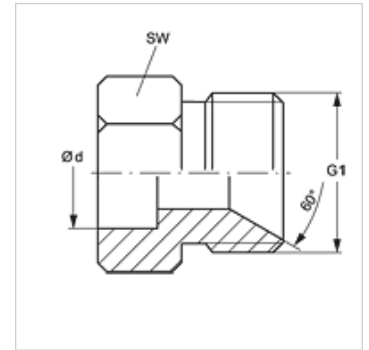

Artikli

| Naziv | Ø d (mm) | G1 | L1 (mm) | SW (mm) |
|---------------|----------|-------------|---------|---------|
| LOET 04 HB 08 | 8 | G 1/4" - 19 | 21,0 | 19 |
| LOET 04 HB 12 | 12 | G 1/4" - 19 | 21,0 | 19 |
| LOET 06 HB 14 | 14 | G 3/8" - 19 | 27,0 | 24 |
| LOET 06 HB 16 | 16 | G 3/8" - 19 | 27,0 | 24 |
| LOET 08 HB 14 | 14 | G 1/2" -14 | 29,5 | 29 |
| LOET 08 HB 16 | 16 | G 1/2" -14 | 29,5 | 24 |
| LOET 08 HB 18 | 18 | G 1/2" -14 | 29,5 | 29 |
| LOET 08 HB 20 | 20 | G 1/2" -14 | 32,5 | 29 |
| LOET 12 HB 20 | 20 | G 3/4" -14 | 37,5 | 35 |
| LOET 12 HB 25 | 25 | G 3/4" -14 | 37,5 | 35 |
| LOET 16 HB 25 | 25 | G 1" -11 | 41,0 | 43 |
| LOET 16 HB 30 | 30 | G 1" -11 | 41,0 | 43 |

Ø d = vanjski promjer cijevi