


# W90 HB HN

Uvrtni nastavak, kut 90°

## Karakteristike

|                    |                                |
|--------------------|--------------------------------|
| Priključak 1       | BSP vanjski navoj, cilindrični |
| Oblik brtve 1      | 60° unutarnji konus            |
| Priključak 2       | NPT vanjski navoji             |
| Oblik brtve 2      | brtvljenje navoja              |
| Izvedba            | Uvrtni nastavci                |
| Oblik izrade       | Kutevi 90°                     |
| Materijal          | Čelik                          |
| Površinska zaštita | galvanski premaz               |

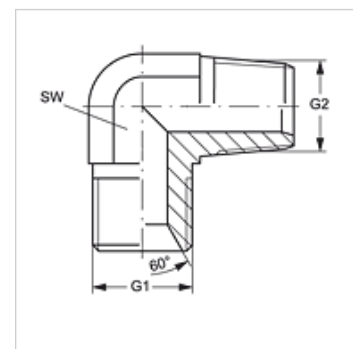

## Artikli

| Naziv           | G1            | G2                | SW<br>(mm) |
|-----------------|---------------|-------------------|------------|
| W90 HB 02 HN    | G 1/8" - 28   | 1/8" -27 NPT      | 11         |
| W90 HB 04 HN 02 | G 1/4" - 19   | 1/8" -27 NPT      | 14         |
| W90 HB 04 HN    | G 1/4" - 19   | 1/4" - 18 NPT     | 14         |
| W90 HB 06 HN 04 | G 3/8" - 19   | 1/4" - 18 NPT     | 19         |
| W90 HB 06 HN    | G 3/8" - 19   | 3/8" - 18 NPT     | 19         |
| W90 HB 06 HN 08 | G 3/8" - 19   | 1/2" - 14 NPT     | 22         |
| W90 HB 08 HN 06 | G 1/2" -14    | 3/8" - 18 NPT     | 22         |
| W90 HB 08 HN    | G 1/2" -14    | 1/2" - 14 NPT     | 22         |
| W90 HB 12 HN 08 | G 3/4" -14    | 1/2" - 14 NPT     | 27         |
| W90 HB 12 HN    | G 3/4" -14    | 3/4" - 14 NPT     | 27         |
| W90 HB 16 HN    | G 1" -11      | 1" -11,5 NPT      | 33         |
| W90 HB 20 HN    | G 1,1/4" - 11 | 1,1/4" - 11,5 NPT | 41         |
| W90 HB 24 HN    | G 1,1/2" - 11 | 1,1/2" - 11,5 NPT | 50         |
| W90 HB 32 HN    | G 2" -11      | 2" -11,5 NPT      | 55         |

SW = širina ključa