


W90 HN HJOF

Uvrtni nastavak, kut 90°

HANSA FLEX

Karakteristike

| | |
|--------------------|----------------------------------|
| Priključak 1 | NPT vanjski navoji |
| Oblik brtve 1 | brtvljenje navoja |
| Priključak 2 | ORFS vanjski navoji |
| Oblik brtve 2 | brtvljenje površina s O-prstenom |
| Izvedba | Uvrtni nastavci |
| Oblik izrade | Kutevi 90° |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

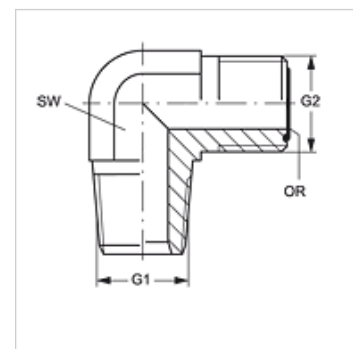

Artikli

| Naziv | G1 | G2 | SW (mm) | OR |
|-------------------|-------------------|-----------------|------------|--------------|
| W90 HN 02 HJOF 04 | 1/8" -27 NPT | 9/16" - 18 UNF | 14 | 7,65 x 1,78 |
| W90 HN 04 HJOF | 1/4" - 18 NPT | 9/16" - 18 UNF | 14 | 7,65 x 1,78 |
| W90 HN 04 HJOF 06 | 1/4" - 18 NPT | 11/16" - 16 UN | 19 | 9,25 x 1,78 |
| W90 HN 06 HJOF | 3/8" - 18 NPT | 11/16" - 16 UN | 19 | 9,25 x 1,78 |
| W90 HN 06 HJOF 08 | 3/8" - 18 NPT | 13/16" - 16 UN | 19 | 12,42 x 1,78 |
| W90 HN 08 HJOF 06 | 1/2" - 14 NPT | 11/16" - 16 UN | 22 | 9,25 x 1,78 |
| W90 HN 08 HJOF | 1/2" - 14 NPT | 13/16" - 16 UN | 22 | 12,42 x 1,78 |
| W90 HN 08 HJOF 10 | 1/2" - 14 NPT | 1" -14 UNS | 27 | 15,60 x 1,78 |
| W90 HN 08 HJOF 12 | 1/2" - 14 NPT | 1,3/16" -12 UN | 30 | 18,77 x 1,78 |
| W90 HN 12 HJOF 08 | 3/4" - 14 NPT | 13/16" - 16 UN | 30 | 12,42 x 1,78 |
| W90 HN 12 HJOF 10 | 3/4" - 14 NPT | 1" -14 UNS | 30 | 15,60 x 1,78 |
| W90 HN 12 HJOF | 3/4" - 14 NPT | 1,3/16" -12 UN | 30 | 18,77 x 1,78 |
| W90 HN 12 HJOF 16 | 3/4" - 14 NPT | 1,7/16" -12 UN | 37 | 23,52 x 1,78 |
| W90 HN 16 HJOF 12 | 1" -11,5 NPT | 1,3/16" -12 UN | 33 | 18,77 x 1,78 |
| W90 HN 16 HJOF | 1" -11,5 NPT | 1,7/16" -12 UN | 37 | 23,52 x 1,78 |
| W90 HN 20 HJOF | 1,1/4" - 11,5 NPT | 1.11/16" -12 UN | 41 | 29,87 x 1,78 |
| W90 HN 24 HJOF | 1,1/2" - 11,5 NPT | 2" -12 UN | 48 | 37,82 x 1,78 |

SW = širina ključa

Varijante proizvoda

W90 HN HJOF VA Uvrtni nastavak, kut 90°, Oplemenjeni čelik