


# W90 HN L HJ

Uvrtni nastavak, dugi, kut 90°

**HANSA FLEX**

## Karakteristike

|                    |                       |
|--------------------|-----------------------|
| Priključak 1       | NPT vanjski navoji    |
| Oblik brtve 1      | brtvljenje navoja     |
| Priključak 2       | UN/UNF vanjski navoji |
| Oblik brtve 2      | 74° vanjski konus     |
| Izvedba            | Uvrtni nastavci, dugi |
| Oblik izrade       | Kutevi 90°            |
| Materijal          | Čelik                 |
| Površinska zaštita | galvanski premaz      |

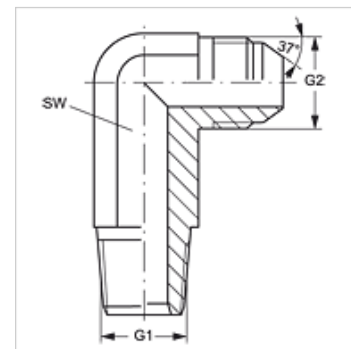

## Artikli

| Naziv             | G1                | G2             | SW<br>(mm) |
|-------------------|-------------------|----------------|------------|
| W90 HN L 02 HJ 04 | 1/8" -27 NPT      | 7/16" - 20 UN  | 11         |
| W90 HN L 04 HJ    | 1/4" - 18 NPT     | 7/16" -20 UNF  | 14         |
| W90 HN L 04 HJ 06 | 1/4" - 18 NPT     | 9/16" - 18 UNF | 14         |
| W90 HN L 06 HJ    | 3/8" - 18 NPT     | 9/16" - 18 UNF | 19         |
| W90 HN L 06 HJ 08 | 3/8" - 18 NPT     | 3/4" - 16 UNF  | 19         |
| W90 HN L 08 HJ 10 | 1/2" - 14 NPT     | 7/8" - 14 UNF  | 22         |
| W90 HN L 12 HJ    | 3/4" - 14 NPT     | 1.1/16" -12 UN | 27         |
| W90 HN L 16 HJ    | 1" -11,5 NPT      | 1,5/16" -12 UN | 33         |
| W90 HN L 20 HJ    | 1,1/4" - 11,5 NPT | 1,5/8" -12 UN  | 41         |

SW = širina ključa