


WB45 AB HB

Spojnicica, kut 45°

HANSA FLEX

Karakteristike

| | |
|---------------------|--------------------------------|
| Priključak 1 | BSP navoji matice |
| Oblik brtve 1 | 60° vanjski konus |
| Priključak 2 | BSP vanjski navoj, cilindrični |
| Oblik brtve 2 | 60° unutarnji konus |
| Izvedba | Spojnice |
| Oblik izrade | Kutevi 45° |
| Dodatak kod izvedbe | Cijevni luk |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

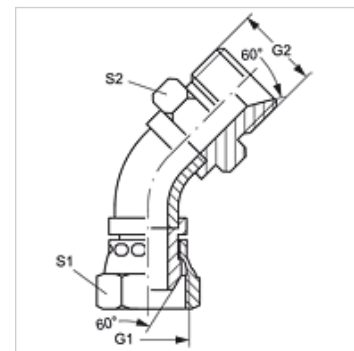

Artikli

| Naziv | G1 | G2 | S1 | S2 |
|---------------|---------------|---------------|----|----|
| WB45 AB 04 HB | G 1/4" - 19 | G 1/4" - 19 | 19 | 19 |
| WB45 AB 06 HB | G 3/8" - 19 | G 3/8" - 19 | 22 | 22 |
| WB45 AB 08 HB | G 1/2" - 14 | G 1/2" - 14 | 27 | 27 |
| WB45 AB 10 HB | G 5/8" - 14 | G 5/8" - 14 | 30 | 30 |
| WB45 AB 12 HB | G 3/4" - 14 | G 3/4" - 14 | 32 | 32 |
| WB45 AB 16 HB | G 1" - 11 | G 1" - 11 | 38 | 41 |
| WB45 AB 20 HB | G 1,1/4" - 11 | G 1,1/4" - 11 | 50 | 50 |
| WB45 AB 24 HB | G 1,1/2" - 11 | G 1,1/2" - 11 | 55 | 55 |
| WB45 AB 32 HB | G 2" - 11 | G 2" - 11 | 70 | 65 |

SW, S1, S2 = širina ključa