


WEO VS SB

WEO slijepa utična čahura

HANSA FLEX

Karakteristike

| | |
|--------------------|-------------------|
| Priključak 1 | WEO utična čahura |
| Oblik brtve 1 | O prsten, brtveni |
| Materijal | Čelik |
| Površinska zaštita | galvanski premaz |

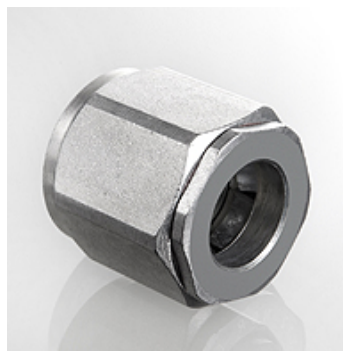

Artikli

| Naziv | Veličina | Radni tlak bari | Ø D1 (mm) | L1 (mm) | SW (mm) | S1 |
|--------------|----------|-----------------|--------------|------------|------------|----|
| WEO VS 10 SB | 1/4" | PN 350 | 10 | 28,0 | 20 | 19 |
| WEO VS 13 SB | 3/8" | PN 350 | 13 | 31,0 | 24 | 22 |
| WEO VS 16 SB | 1/2" | PN 350 | 16 | 32,0 | 28 | 27 |
| WEO VS 23 SB | 3/4" | PN 350 | 23 | 44,0 | 32 | 32 |
| WEO VS 30 SB | 1" | PN 250 | 30 | 55,0 | 41 | 41 |

SW, S1, S2 = širina ključa