

DRV 1700

Prigušni povratni ventil DVR 1700


HANSA FLEX

Karakteristike

Opseg isporuke s protumaticom

Mediji mineralno ulje

Radni tlak maks. 210 bar

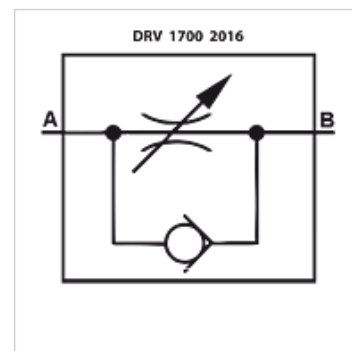

Napomena

Ovi ventili moraju biti namješteni ovisno o slučaju primjene

Artikli

| Naziv | Protok max. (L/min) | G1 | A (mm) | B (mm) | C (mm) | Težina (kg) |
|--------------|------------------------|-------------|-----------|-----------|-----------|----------------|
| DRV 1700-1/4 | 15 | G 1/4" - 19 | 56 | 60 | 17 | 0,15 |
| DRV 1700-3/8 | 30 | G 3/8" - 19 | 65 | 73 | 22 | 0,28 |
| DRV 1700-1/2 | 50 | G 1/2" -14 | 87 | 85 | 27 | 0,52 |