



# RBS M

Osigurač od pucanja cijevi M

**HANSA FLEX**

## Karakteristike

|            |                |
|------------|----------------|
| Materijal  | Čelik          |
| Radni tlak | maks. 400 bara |

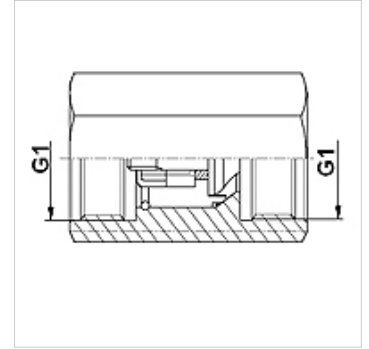

## Artikli

| Naziv           | Radni tlak<br>(bar) | G1         | Količina zatvaranja<br>(L/min) | Težina<br>(kg) |
|-----------------|---------------------|------------|--------------------------------|----------------|
| RBS 06-20 M 16  | 400,0               | M 16 x 1,5 | 20                             | 0,30           |
| RBS 06-40 M 16  | 400,0               | M 16 x 1,5 | 40                             | 0,30           |
| RBS 10-63 M 22  | 315,0               | M 22 x 1,5 | 63                             | 0,30           |
| RBS 10-90 M 22  | 315,0               | M 22 x 1,5 | 90                             | 0,35           |
| RBS 16-200 M 30 | 315,0               | M 30 x 1,5 | 200                            | 0,35           |