


AFC U (3000 / 6000 PSI)

SAE zaporna prirubnica

HANSA FLEX

Karakteristike

| | |
|---------------------------|-------------------------------------|
| Norma | SAE J 518 C ISO 6162 |
| Oblik izrade | ravno |
| Izvedba | SAE zaporna prirubnica |
| Pričvršćenje | vijčani provrt |
| Opseg isporuke | s UNC kompletom vijaka i O prstenom |
| Materijal | S355J2G3 (ST52.3) |
| Površinska zaštita | crno nauljeno |

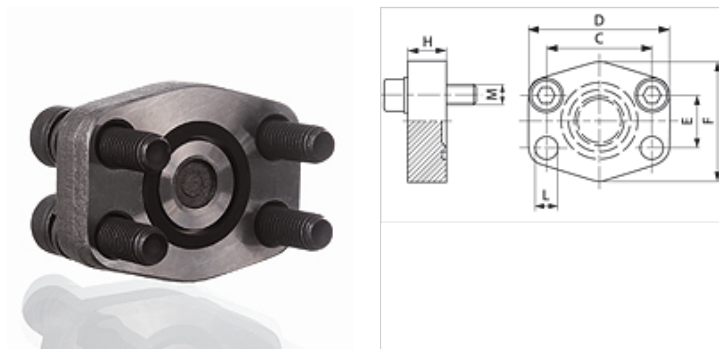

Napomena

Navedeni maksimalni radni tlak odnosi se na prirubnicu! Stvarni radni tlak određuje cijev (debljina stijenke) i kvaliteta cijevi!

Artikli

| Naziv | Tlačni niz | PB 10.9 (bar) | Veličina | C (mm) | D (mm) | E (mm) | F (mm) | H (mm) | L (mm) | M unc |
|-----------|------------|---------------|----------|--------|--------|--------|--------|--------|--------|----------------|
| AFC 80 U | 3000 PSI | 350 | 1/2" | 38,1 | 56 | 17,5 | 48 | 16 | 9,0 | 5/16" x 1.1/4" |
| AFC 100 U | 3000 PSI | 350 | 3/4" | 47,6 | 65 | 22,2 | 50 | 16 | 11,0 | 3/8" x 1.1/2" |
| AFC 102 U | 3000 PSI | 315 | 1" | 52,4 | 70 | 26,2 | 60 | 19 | 11,0 | 3/8" x 1.1/2" |
| AFC 104 U | 3000 PSI | 250 | 1.1/4" | 58,7 | 79 | 30,2 | 68 | 18 | 11,5 | 7/16" x 1.1/2" |
| AFC 106 U | 3000 PSI | 200 | 1.1/2" | 69,9 | 93 | 35,7 | 78 | 20 | 13,5 | 7/16" x 1.1/2" |
| AFC 108 U | 3000 PSI | 200 | 2" | 77,8 | 102 | 42,9 | 90 | 20 | 13,5 | 7/16" x 1.1/2" |
| AFC 110 U | 3000 PSI | 160 | 2.1/2" | 88,9 | 114 | 50,8 | 105 | 20 | 13,5 | 7/16" x 1.1/2" |
| AFC 112 U | 3000 PSI | 138 | 3" | 106,4 | 134 | 61,9 | 124 | 24 | 17,5 | 5/8" x 2" |
| AFC 114 U | 3000 PSI | 35 | 3.1/2" | 120,7 | 152 | 69,9 | 136 | 22 | 17,5 | 5/8" x 2" |
| AFC 116 U | 3000 PSI | 35 | 4" | 130,2 | 162 | 77,8 | 146 | 25 | 17,5 | 5/8" x 2" |
| AFC 118 U | 3000 PSI | 35 | 5" | 152,4 | 190 | 92,1 | 170 | 28 | 17,5 | 5/8" x 2" |
| AFC 401 U | 6000 PSI | 400 | 1/2" | 40,5 | 56 | 18,2 | 48 | 16 | 9,0 | 5/16" x 1.1/4" |
| AFC 402 U | 6000 PSI | 400 | 3/4" | 50,8 | 71 | 23,8 | 60 | 19 | 11,0 | 3/8" x 1.1/2" |
| AFC 403 U | 6000 PSI | 400 | 1" | 57,2 | 81 | 27,8 | 70 | 24 | 13,0 | 7/16" x 1.1/2" |
| AFC 404 U | 6000 PSI | 400 | 1.1/4" | 66,7 | 95 | 31,8 | 78 | 27 | 13,5 | 1/2" x 1.3/4" |
| AFC 405 U | 6000 PSI | 400 | 1.1/2" | 79,4 | 112 | 36,5 | 94 | 30 | 17,0 | 5/8" x 2" |
| AFC 406 U | 6000 PSI | 400 | 2" | 96,8 | 134 | 44,5 | 114 | 28 | 21,0 | 3/4" x 2.1/2" |

PN = nazivni tlak PB = maks. radni tlak

Varijante proizvoda

| | |
|-------------------------|---|
| AFC M (3000 / 6000 PSI) | SAE zaporna prirubnica, s kompletom metričkih vijaka i O prstenom |
| AFC (3000 / 6000 PSI) | SAE zaporna prirubnica, samo prirubnica |