

# T BL

SAE blok prirubnica, T oblik

**HANSA FLEX**

## Karakteristike

Tlačni niz 6000 psi


Norma SAE J 518 C  
ISO 6162

Oblik izrade T oblik

Izvedba SAE blok prirubnica

Pričvršćenje Unutarnji navoji za metr. vijke

Materijal S355J2G3 (ST52.3)

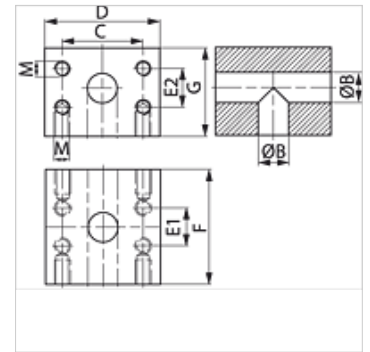

## Artikli

Naziv	PB 10.9 (bar)	Veličina	Ø B (mm)	C (mm)	D (mm)	E1 (mm)	E2 (mm)	F (mm)	G (mm)	M metr.
<b>T BL 602-602</b>	400	3/4"	19	50,8	72	23,8	23,8	72	55	M 10
<b>T BL 603-603</b>	400	1"	23	57,2	82	27,8	27,8	82	64	M 12
<b>T BL 604-604</b>	400	1.1/4"	30	66,7	100	31,8	31,8	92	72	M 14
<b>T BL 605-605</b>	400	1.1/2"	38	79,4	110	36,5	36,5	98	98	M 16
<b>T BL 606-606</b>	400	2"	50	96,8	133	44,5	44,5	140	105	M 20

PN = nazivni tlak PB = maks. radni tlak